

# TN263

## Updating Your Application from the RCM3200/RCM3220 to the RCM3209/RCM3229

### Introduction

Rabbit is changing our product offerings to respond to both market requirements and the components available to us.

We can no longer obtain certain components for the RCM3200/RCM3220 RabbitCore modules that support the originally specified  $-40^{\circ}\text{C}$  to  $+70^{\circ}\text{C}$  temperature range. Instead of changing the design of the RCM3200/RCM3220 RabbitCore modules to handle available components specified for the original temperature range, we decided to develop a new product line — the RCM3209/RCM3229 — based on the RCM3900/RCM3910 RabbitCore modules that were released for the same reason.

We are introducing the RCM3209/RCM3229 RabbitCore modules in June, 2008. These new modules are similar in form, dimensions, and function to the RCM3200/3220 modules. We strongly recommend that existing RCM3200/3220 customers and designers of new systems consider using the new RCM3209/RCM3229 RabbitCore modules.

This Technical Note compares the two series of RabbitCore modules, and provides complete information on how to port your application developed for the RCM3200/RCM3220 to the equivalent RCM3209/RCM3229 RabbitCore modules.

### Comparing the RCM3200/RCM3220 and the RCM3209/RCM3229

#### Temperature Specifications

RCM3200/RCM3220 RabbitCore modules manufactured after May, 2008, are specified to operate at  $0^{\circ}\text{C}$  to  $+70^{\circ}\text{C}$ . The RCM3209/RCM3229, rated for  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ , are available starting in June, 2008.

#### Ethernet Chip

A different Ethernet controller chip is used on the RCM3209. The Ethernet chip is able to detect automatically whether a crossover cable or a straight-through cable is being used in a particular setup, and will configure the signals on the Ethernet jack interface. The RCM3229, like the RCM3220, has no Ethernet interface.


#### Maximum Current

The RCM3200/RCM3220 draws 255 mA vs. the 325 mA required by the RCM3209 (with Ethernet) or 190 mA (RCM3229 without Ethernet).

## LEDs

The **LNK/ACT** LEDs have been combined to one LED on the RCM3209, and the RCM3209 has an **FDX/ COL** LED where the **ACT** LED was on the RCM3200. The RCM3229, like the RCM3220, has no LEDs and no Ethernet.

Figure 1 compares the RCM3200/RCM3220 and the RCM3209/RCM3229 component layouts. The LED placements on the boards remain unchanged.

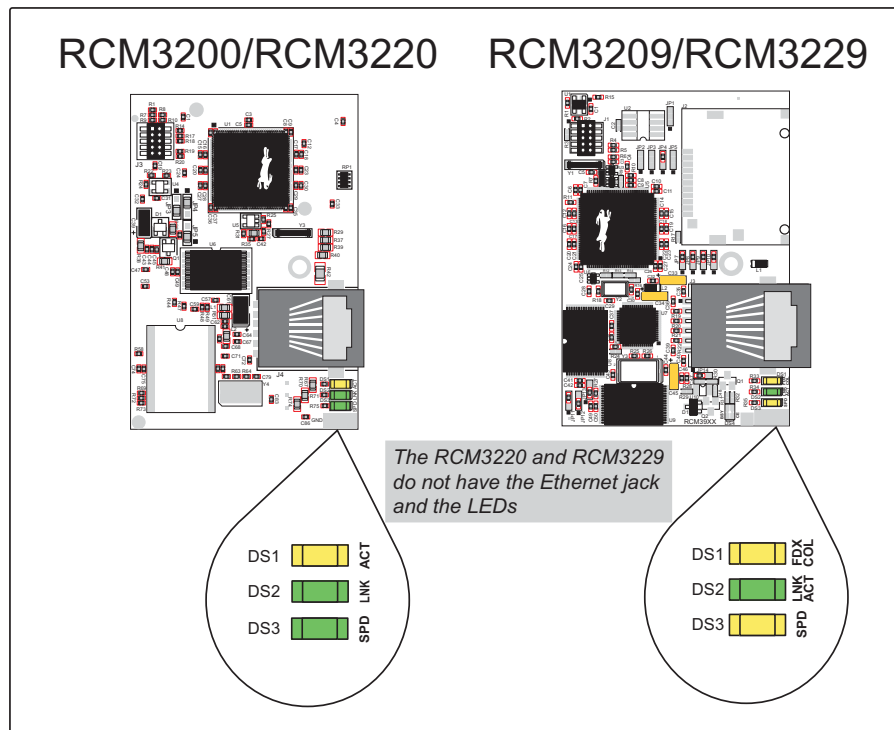

**Figure 1. RCM3200/RCM3220 and RCM3209/RCM3229 LED Layouts**

## Dynamic C

You may run your application developed for the RCM3200/RCM3220 on the RCM3209/RCM3229 after you recompile it using Dynamic C v. 9.60 or later.

Dynamic C v. 9.60 now has many of the previously optional modules included in the standard release. Table 1 compares the Dynamic C features available for the two series of RabbitCore modules.

**Table 1. Comparison of Dynamic C Resources**

Dynamic C	RCM3200/RCM3220	RCM3209/RCM3229
Standard Release	v. 9.21	v. 9.60
Optional Modules (purchased separately)	<ul style="list-style-type: none"> <li>• FAT File System</li> <li>• RabbitWeb</li> <li>• Point-to-Point Protocol (PPP)</li> <li>• Simple Network Management Protocol (SNMP)</li> <li>• <math>\mu</math>C/OS-II Real-Time Kernel</li> <li>• Library Encryption Executable</li> <li>• Modbus TCP</li> </ul>	Included in Standard Release
Optional Security Modules (purchased separately)	<ul style="list-style-type: none"> <li>• Advanced Encryption Standard (AES)</li> <li>• Secure Sockets Layer (SSL)</li> </ul>	<ul style="list-style-type: none"> <li>• Rabbit Embedded Security Pack</li> </ul>
Other Optional Modules (available separately)	<ul style="list-style-type: none"> <li>• Rabbit Field Utility source code</li> <li>• One-Year Telephone Technical Support Subscription</li> </ul>	<ul style="list-style-type: none"> <li>• Rabbit Field Utility source code</li> <li>• One-Year Telephone Technical Support Subscription</li> </ul>

## Summary

Table 2 summarizes the features for the two series of RabbitCore modules.

**Table 2. Feature Comparison**

Parameter	RCM3200	RCM3220	RCM3209	RCM3229
Ethernet Port	10/100Base-T, RJ-45, 3 LEDs	—	10/100Base-T, RJ-45, 3 LEDs	—
SRAM	512K program (fast SRAM) + 256K data		512K program (fast SRAM) + 256K data	
Flash Memory (program)	512K		512K	
Operating Temperature	-40°C to +70°C (up to May, 2008) 0°C to +70°C (after May, 2008)		-40°C to +85°C	
Operating Temperature	-40°C to +70°C		-40°C to +85°C	
Board Size	1.850" × 2.725" × 0.86" (47 mm × 69 mm × 22 mm)			
Dynamic C	v. 9.21 (standard release)		v. 9.60 (standard release)	

**NOTE:** The RCM3210 was discontinued in July, 2004, and is no longer offered. Therefore, there is no replacement for it.

**Rabbit — A Digi International Brand**

[www.rabbit.com](http://www.rabbit.com)